


## Waterborne Finishing Systems for Parquet and Hardwood Floors

For information about compatibility of products with certain wood species or applications, please refer to the corresponding Technical information Bulletin.

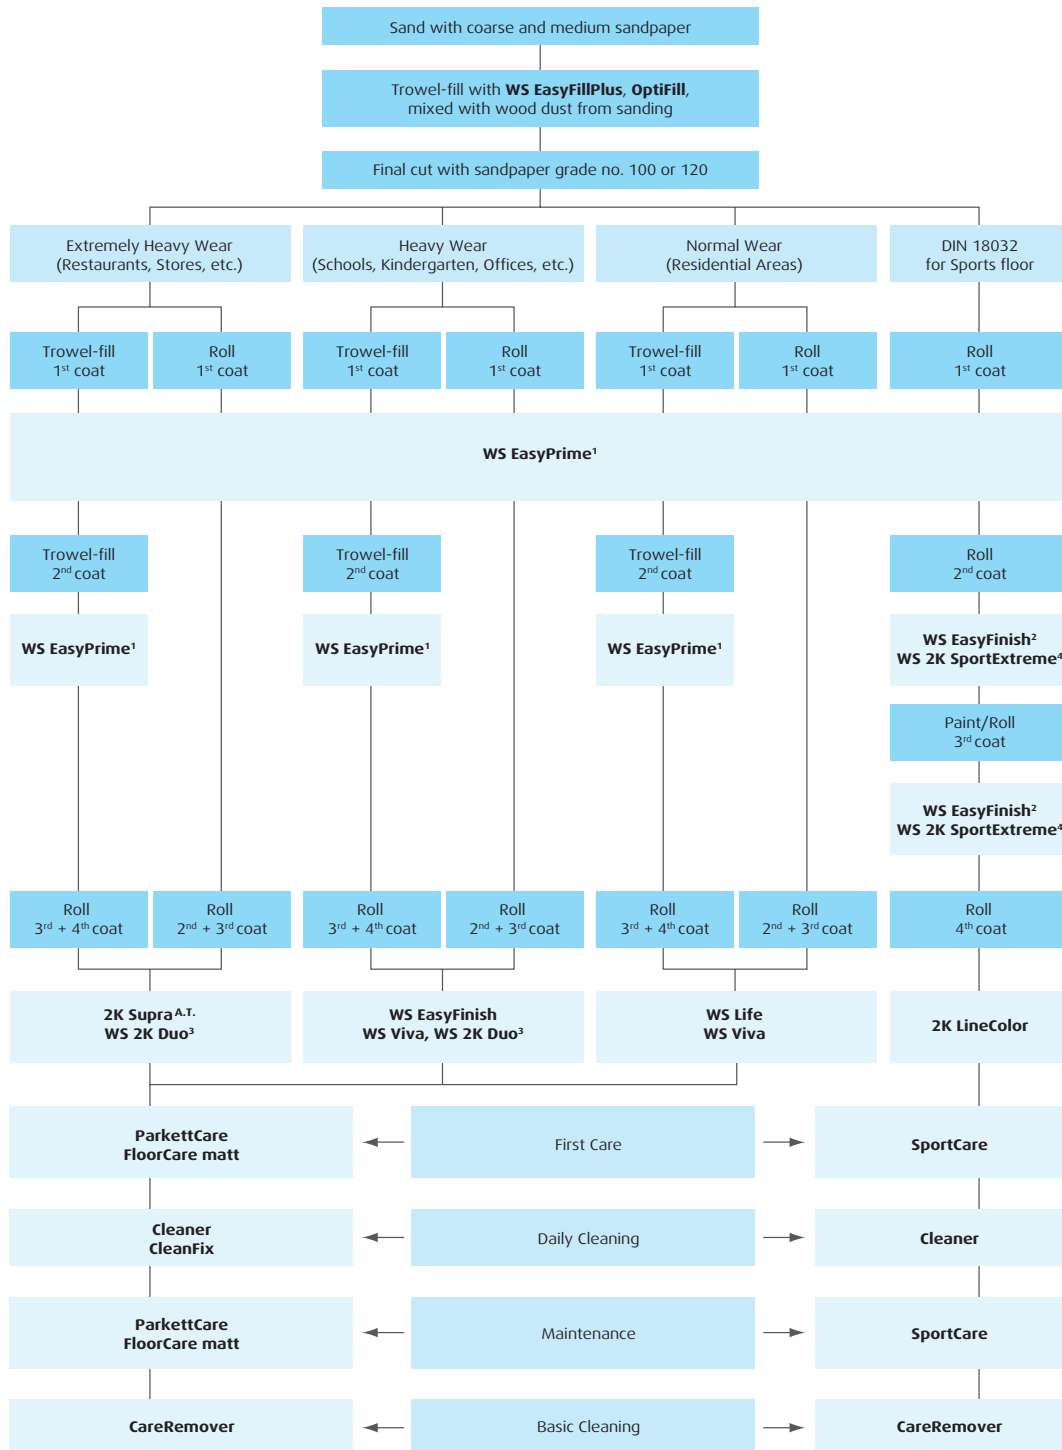

<sup>1</sup> WS EasyPrime: We recommend the use of this primer to reduce the tendency of side-bonding of waterborne finishes. The substitution of the Primer with a finish is possible, but can lead to streaking, discoloration and side-bonding.


<sup>2</sup> WS EasyFinish: Maintenance sports floors with LOBA® SportCare to retain the slip resistance necessary for fulfilling the requirements of DIN 18032. Please note the special care instruction!

<sup>3</sup> WS 2K Duo anti-slip has to be used if required by BGR 181. Please note the special care instruction!

<sup>4</sup> WS 2K SportExtreme: Maintenance sports floors with LOBA® SportCare to retain the slip resistance necessary for fulfilling the requirements of DIN 18032. Please note the special care instruction!

## Waterborne Finishing Systems

For information about compatibility of the products with certain wood species or applications, please refer to the corresponding Technical Information Bulletin.

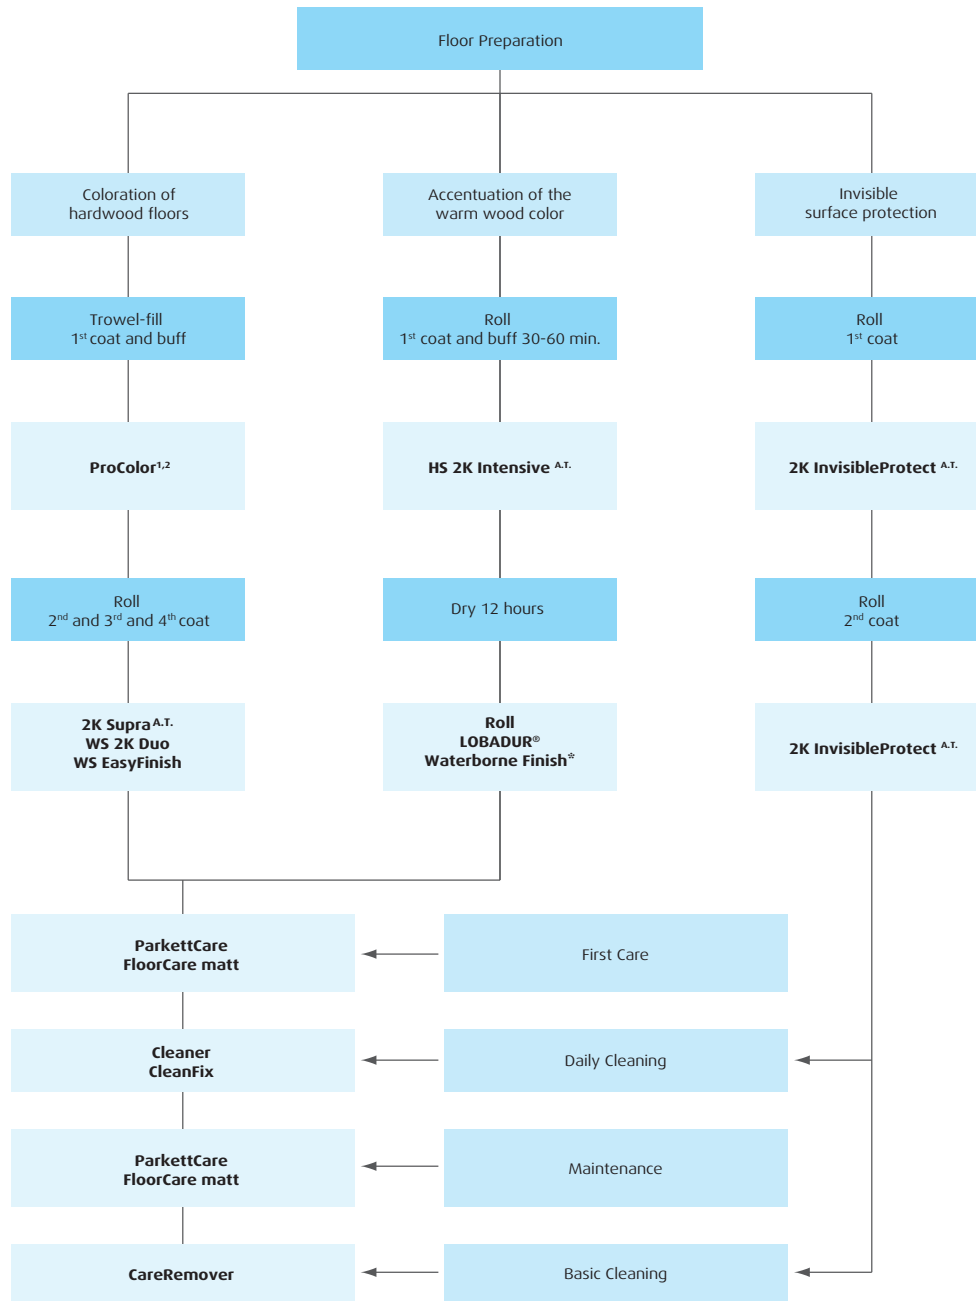

<sup>1</sup> LOBADUR® ProColor does not minimize the tendency for side-bonding of waterborne finishes.

<sup>2</sup> After application buff with a single disk machine and a beige pad.

\* See Technical Information!